

# Havoline® Antifreeze/Coolant Reference Chart



For All North American, European and Asian Cars, Trucks and Vans (Gasoline/Diesel/Hybrid)\*

For Newer Vehicles



## Havoline Xtended Life Antifreeze/Coolant

236542: Concentrate      236543: 50/50

Officially approved by GM under 6277M (DEX-COOL®) specification.

Meets the specifications of: ASTM D3306, Ford WSS-M97B44-D, MB 325.3, VW TL 774F

Recommended for use in all makes and models of automobiles and light duty trucks.

Recommended for:

- General Motors vehicles 1995 and newer
- Chrysler vehicles 2001 and newer
- Ford vehicles 2003 and newer

**Service Life: 5 years/240,000 km (150,000 miles)**

For Service Fill or Top Up



## Havoline Universal Antifreeze/Coolant

227062: Concentrate      227063: 50/50

Offers exceptional protection at high operating temperatures. Minimizes the occurrence of hard water scale.

Meets: ASTM D3306

Recommended for all makes and models of automobiles and light duty trucks.

**Service Life: 5 years/240,000 km (150,000 miles)**

For Older Vehicles



## Havoline Conventional Antifreeze/Coolant

226110: Concentrate      226821: 50/50

Provides excellent protection to automotive cooling system components including aluminum.

Meets: ASTM D3306, D4895, TMC of ATA RP-302A

Suitable for use in:

- General Motors vehicles pre-1994
- FCAs (formerly known as Chrysler) prior to 1999
- Ford vehicles prior to 2001

**Service Life: 2 years/80,000 km (50,000 miles)**

**Havoline.com**

**1-800-Lube-Tek**

\*Always check OEM recommendations and customer operating conditions to provide the correct Chevron product.

A **Chevron** company product


© 2017 Chevron Canada Limited. All rights reserved. All trademarks are the property of Chevron Intellectual Property LLC or their respective owners.

CH2017HACREFE

# Havoline® Antifreeze/Coolant Reference Chart



For All North American, European and Asian Cars, Trucks and Vans (Gasoline/Diesel/Hybrid)\*

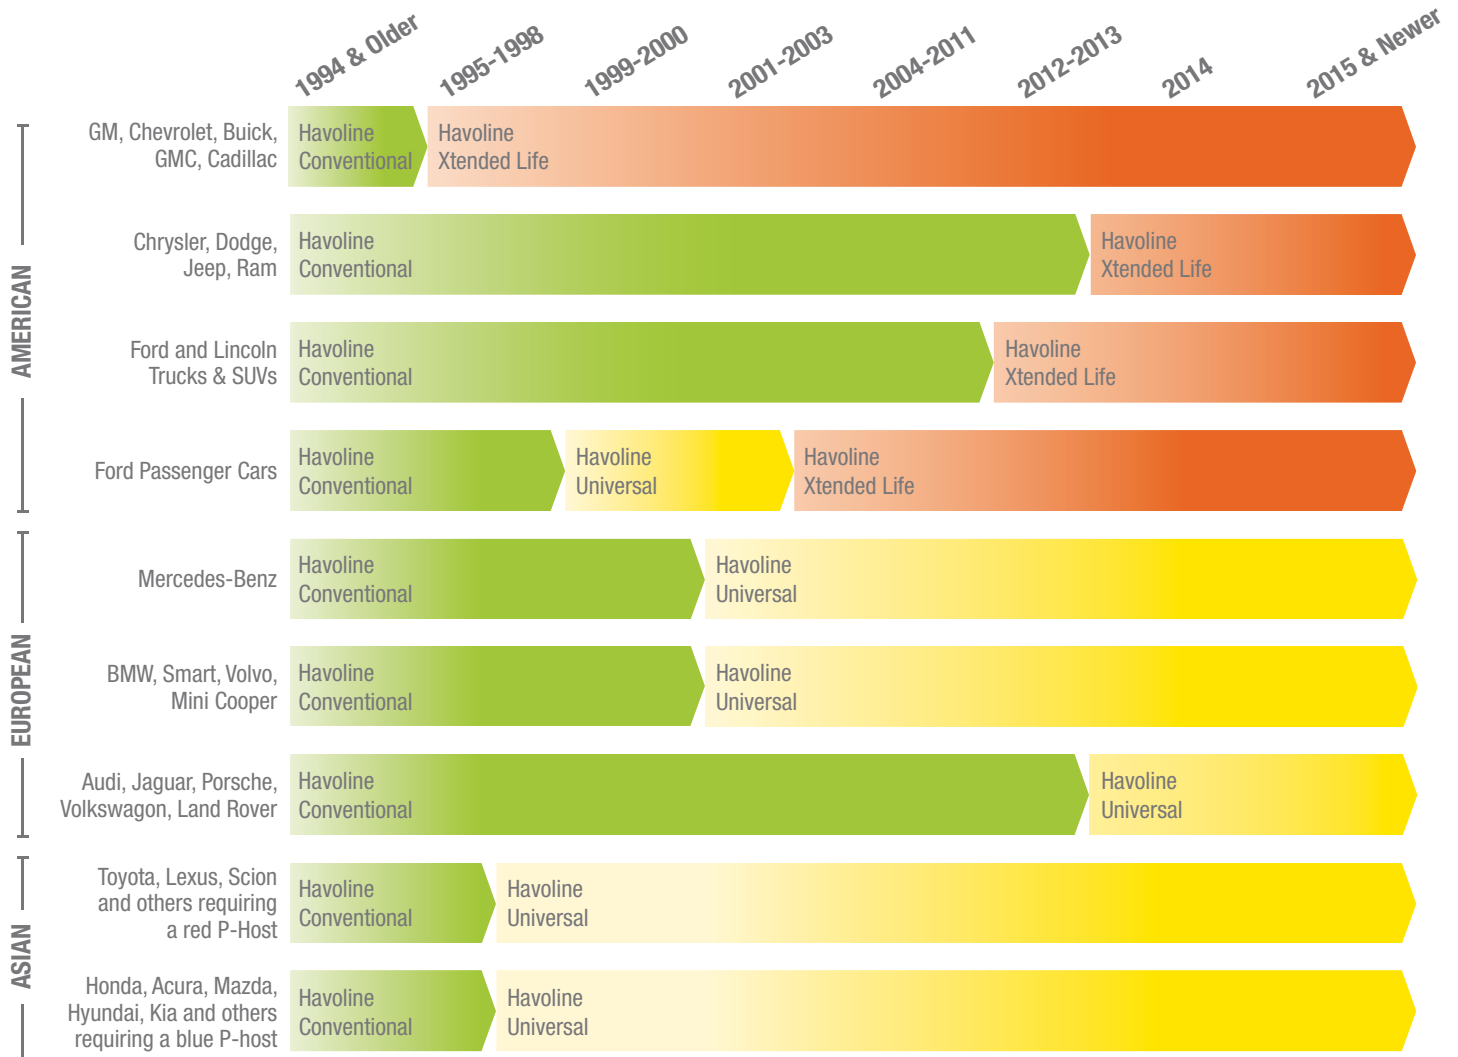

**Concentrate 236542,  
Premixed 50/50 236543**



**Concentrate 227062,  
Premixed 50/50 227063**



**Concentrate 226110,  
Premixed 50/50 226821**

\*Always check OEM recommendations and customer operating conditions to provide the correct Chevron product.